


### **Specifications**

# GR22-Series 2" Discharge Guide Rail System




#### **GR22-Series Dimensional Data**

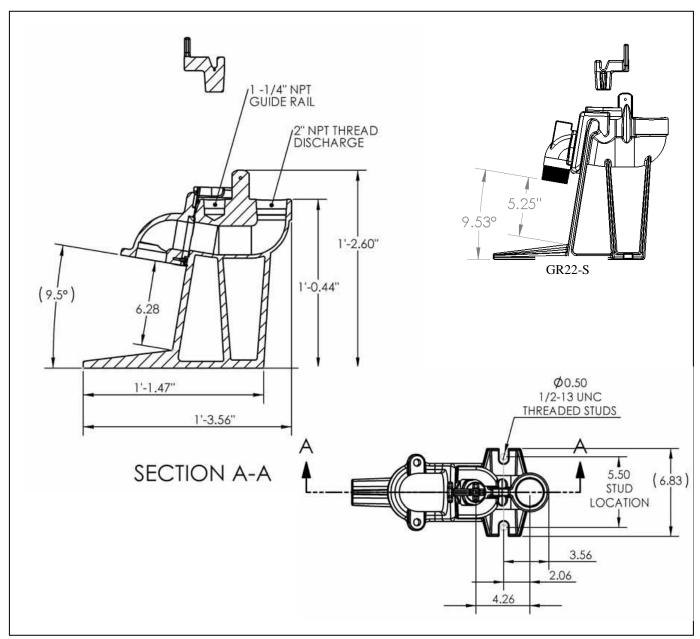


#### **GR22-Series Technical Data**

GUIDE RAIL BASE / DISCONNECT	CLASS 25 GRAY CAST IRON
GUIDE RAIL	ACCEPTS STANDARD 11/4" NPT PIPE (PIPE NOT INCLUDED)
DISCHARGE PIPE	ACCEPTS STANDARD 2" NPT PIPE (PIPE NOT INCLUDED)
PAINT	POWDERCOATING
HARDWARE	STAINLESS STEEL
SEALING GROMMET	BUNA N
	<b>GR22-FL:</b> FITS FL100, FL150, AND FL200-SERIES PUMPS, PLUS 2" FEMALE THREADS ALLOW USE WITH OTHER PUMPS
PUMP INTERFACE	GR22-LE: FITS LE70, LE100, LEH100, LEH150, AND LEH200-SERIES PUMPS, PLUS 2" FEMALE THREADS ALLOW USE WITH OTHER PUMPS
	GR22-S: FITS LE40 AND LE50; THE DETACHABLE THREADED NIPPLE ALLOWS THIS RAIL TO BE USED WITH ALMOST ANY PUMP WITH A 2" NPT THREADED DISCHARGE.
MAXIMUM PUMP WEIGHT	250LBS

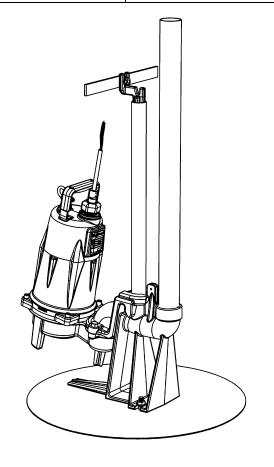



The GR22-LE and GR22-FL have a flanged claw that mounts directly to pump, They also have a 2" NPT threaded port for optional nipple connection.



The GR22-S has a 2" NPT detachable threaded nipple.




## **Specifications**


**GR30 3" Discharge Guide Rail System** 



#### **GR30 Technical Data**

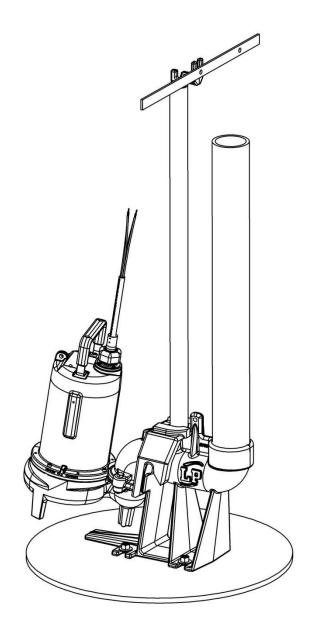

GUIDE RAIL BASE / DISCONNECT	CLASS 25 GRAY CAST IRON
GUIDE RAIL	ACCEPTS STANDARD 11/4" NPT PIPE (PIPE NOT INCLUDED)
DISCHARGE PIPE	ACCEPTS STANDARD 3" NPT PIPE (PIPE NOT INCLUDED)
PAINT	POWDERCOATING
HARDWARE	STAINLESS STEEL
SEALING GROMMET	BUNA N
PUMP INTERFACE	GR30: FITS LE70, LE100, LEH100, LEH150, AND LEH200-SERIES PUMPS, PLUS 3" FEMALE THREADS ALLOW USE WITH OTHER PUMPS
MAXIMUM PUMP WEIGHT	250LBS



#### **GR30 Dimensional Data**

