

WORKING VOLUME: 41200L
 TOTAL VOLUME: 44300L

CONCRETE: 35 MPa WITH 5-8% AIR ENTRAINMENT
 NON-SULPHATE RESISTANT

REINFORCING: WALLS, FLOOR, AND LID
 10M@ 200mm O/C E/W
 10M BAR DIAGONALS AT EACH CORNER OF LID OPENINGS



WEIGHT TOP SECTION 13000 KGS
 BOTTOM SECTION 13000 KGS
 TOTAL 26000 KGS

MAXIMUM BURIAL DEPTH: 1200mm (48")

WATER TIGHTNESS: 2X ROWS CON-SEAL CS-102x1-1/4" MASTIC SEALANT BETWEEN PIECES. SEALANT APPLIED ONSITE BY BOYD BROS CONCRETE ACCORDING TO MANUFACTURER'S RECOMMENDED METHOD.

PIPE/WALL CONNECTIONS: POLYLOK IV 100mm HIGH PRESSURE SEAL CAST IN CONCRETE

ACCESS OPENINGS: TUF-TITE 24X6 RISER AND LID. ADDITIONAL RISERS AVAILABLE. OPSD AND PUMP ACCESS LIDS AVAILABLE.

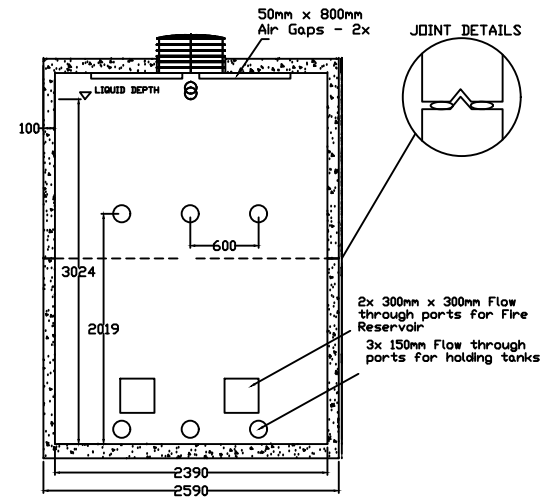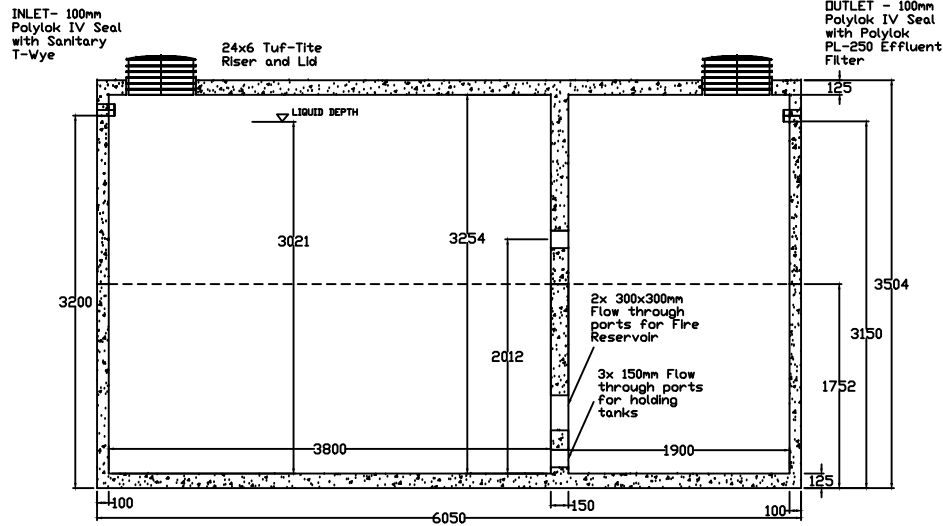

BOYD BROTHERS

5450 CUDDY ST, OSGOODE, ONT, K0A 2W0
 tel (613) 826-2318 fax (613) 826-3679
 toll free 888-846-6664
 website www.boydbrosconcrete.ca
 e-mail info@boydbrosconcrete.ca

PRODUCT

41200L 2-COMPARTMENT SEPTIC TANK

SERIES NO	12.2	MODEL NO	41	MODELS IN SERIES	12.2, 13.6, 18.5, 23, 27, 30, 35
SCALE	1:50	REV	1.0	DATE	April 6, 2018