


ECOFLO[®] FIBREGLOSS



MAX. CAPACITY




FINAL FOOTPRINT

Solution for:

- sites with limited space
- remote locations
- gravity-discharge installations

Advantages:


- Type A dispersal bed directly under the tank
- minimal final footprint
- compact and lightweight

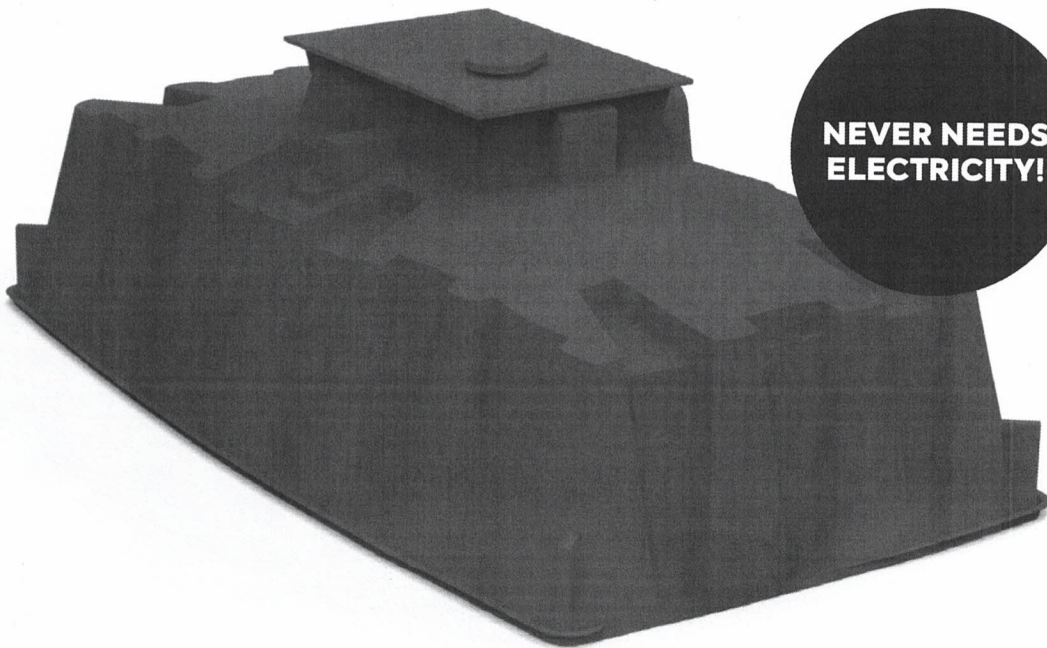

**NEVER NEEDS
ELECTRICITY!**


FIBREGLASS

Open tank bottom

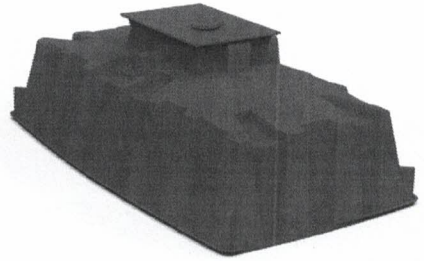

		ST-500	ST-650	ST-750
Hydraulic capacity with demand dose		1,600 L/d	2,000 L/d	2,310 L/d
Hydraulic capacity with time dose		2,000 L/d	2,500 L/d	2,890 L/d
Length	A	3,345 mm (11')	4,175 mm (13' 8")	4,675 mm (15' 4")
Width	B	2,361 mm (7' 9")		
Height	C	1,320 mm (4' 4")		
Inlet height from bottom	D	970 mm (3' 2")		
Riser height allowed		No risers allowed		
Weight		115 kg (250 lb)	135 kg (300 lb)	145 kg (320 lb)


Water inlet
 Ø 100 mm (4") nominal

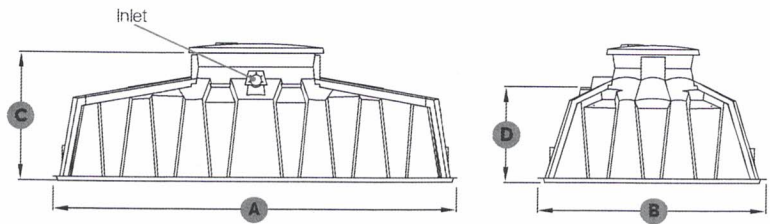

TYPICAL INSTALLATIONS

Demand-dose influent

Direct infiltration to Type A dispersal bed



Time-dose influent

Direct infiltration to Type A dispersal bed

